




# CamWash

**Clear vision at your fingertips**

CamWash cleans away dirt, ice, and snow from obstructing your view. CamWash uses washer fluid for year round operation. With a push of a button, washer fluid sprays your camera clean. It eliminates dirt without scratching the lens. Custom kits are available to fit all your needs. It is an easy install, that will make you wonder how you ever saw without it.



**M. S. Foster & Associates, Inc.**

1866 N. Country Lane, Michigan City, IN 46360  
Phone 219-380-3266 or 219-879-9225 • Toll Free 888-452-4053  
Fax 219-879-9313 • email: [sales@msfoster.com](mailto:sales@msfoster.com)  
[www.msfoster.com](http://www.msfoster.com)

# CamWash Kit




- Easy to install
- Uses washer fluid for year round operation
- Non-abrasive, non-contact cleaning action
- 12 Volt high pressure pump standard, 24 Volt pump option available
- 1 Gallon reservoir with mounting hardware
- Momentary rocker switch with LED Lamp
- 30 foot electric harness and fluid tubing kit
- Custom kits are available for all applications

MSF1128ASA Single Nozzle Kit (Shown) MSF112802ASA Dual Nozzle Kit (Optional)

Threaded hex. fitting can be adjusted with a 1/2" open end wrench, and Spray Nozzle can be adjusted with a small flat screwdriver to obtain the preferred spray pattern on most camera lens. Universal Nozzle Block design fits most camera mounting hole spacing. Spray nozzle has dual axis adjustability to provide the optimum spray pattern on most camera lens.

Installation Diagram (Below)

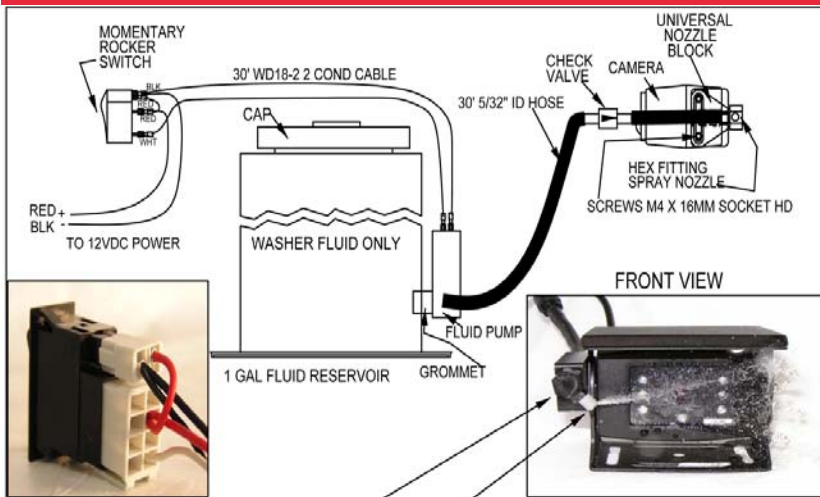

**DUAL AXIS ADJUSTABILITY**

ADJUST HEX FITTING AND SLOTTED SPRAY NOZZLE TO ACHIEVE DESIRED SPRAY PATTERN ON CAMERA LENS. 1/2" OPEN END WRENCH AND SMALL FLAT BLADE SCREWDRIVER  
NOZZLE BLOCK CAN BE MOUNTED TO EITHER SIDE OF CAMERA

Optional Stainless Steel Box Shown. (Below)



(On Right) Available with 'U' Pivot Mounting Bracket (p/n MSF 5000 CAM 'U') or Adjustable Ram Mounting Bracket (p/n MSF 5001 Camera).