


Camerawash


Keep your vision clear with a touch of a button

Camerawash eliminates dirt, ice, and snow from obstructing your view. It can be used on your rear vision camera, collision avoidance sensors, tail lights, mirrors, or headlights. With a push of a rocker switch, washer fluid mixes with high pressure air from your truck. After cleaning the surface, push the rocker switch in the down position and it blows the surface dry without any scratching. It is a non-abrasive, non-contact cleaning action. It is an easy install that will improve your vision tremendously. You can even get a timer for automatic cleaning! Custom kits are available to fit all your cleaning needs.

Optional Stainless Steel Box Shown.

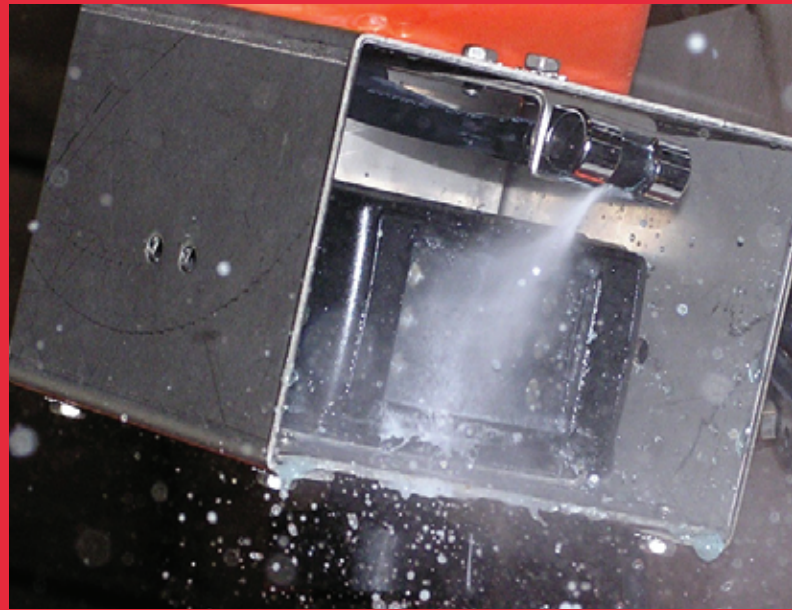

Available with 'U' Pivot Mounting Bracket (p/n MSF 5000 CAM 'U') or Adjustable Ram Mounting Bracket (p/n MSF 5001 Camera).



M. S. Foster & Associates

1866 N. Country Lane, Michigan City, IN 46360
Phone 219-879-9225 • Toll Free 888-452-4053
Fax 219-879-9313 • email: sales@msfoster.com
www.msfoster.com


Includes dash mounted rocker switch, fluid reservoir, pump, air solenoid, nozzle & bracket, wiring, tubing, and installation instructions.



MSF 8470037000 (MSF5010 Tubing Kit sold separately)

MSF1128-08

- Easy to install
- Non-abrasive, non-contact cleaning action
- Custom kits are available for all applications
- Standard kit includes 30 foot long harness
Custom lengths are available
- An optional timer is available for automatic cleaning, p/n MSF1115-3 includes a 20 ft. harness. (p/n MSF1115-5 without harness).
- Add a stainless steel box for mounting on the side or under side
- Optional nema box for ease of mounting
- Add up to four optional nozzles per kit Nozzle Kit (p/n MSF8470038000)
- One year warranty

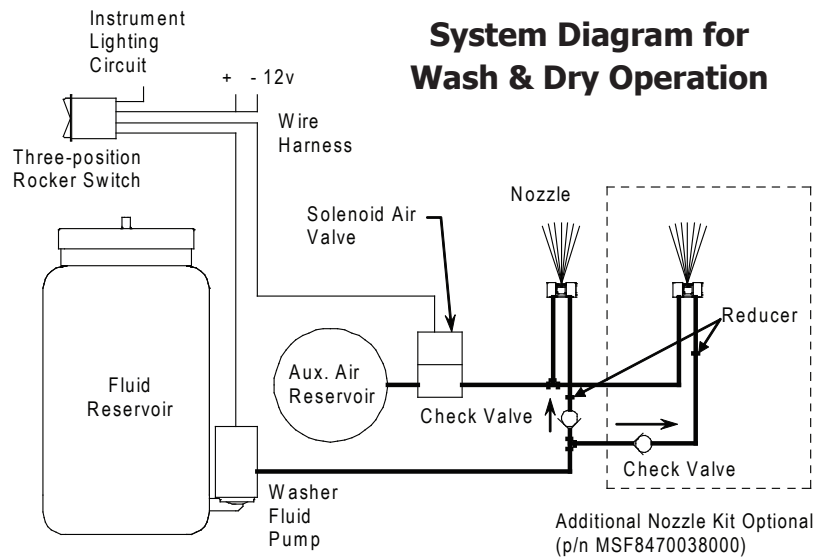

The CameraWash timer controls the washer pump and air solenoid in a multistage operation, enabling the operator to set the time for washer/air operation from 1 to 6 seconds. The second timer can be adjusted to run air only up to an additional 30 seconds after the washer/air sequence to aid in removing the remaining washer fluid solution from the camera lens. The third timer is adjustable from 1 to 30 minutes for automatic cycle time delay.

Typical Camera shown with Optional Side Mounted Nozzle.

Mounts under dash with two screws.

Additional Nozzle kit



MSFBLK4448BA (Black) or MSFBLK4449WA (White)

(MSF1115-3 w/ 20ft harness) (MSF1115-3 w/o harness)

MSF8470038000