#### PRODUCT INFORMATION

**Description** 12-24V DOT/ECE RHT Heated Low

Profile Headlight - 2 Light Kit

 Height
 83.00 mm / 3.27 in

 Width
 334.00 mm / 13.15 in

 Depth
 85.00 mm / 3.35 in

ShapeRectangularOuter Lens MaterialPolycarbonate

Outer Lens ColorClearHousing MaterialAluminumHousing ColorBlackBezel ColorBlack

Mounting Hardware Description (x2) M8-1.25 x 25mm SS Carriage Bolt

Mounting Type Universal Pedestal Mount

**Retrofits** Pedestal mount snow plow lights

Minimum Operating -30 °C / -22 °F

Temperature

**Maximum Operating** 55 °C / 131 °F

**Temperature** 

Connector or Wiring6-Pin Delphi (#12052848)Mating ConnectorDelphi (#12052848)Product Weight1.20 lbs / 0.54 kgs

Shipping Weight 6.25 lbs / 2.83 kgs












1866 North Country Lane Michigan City, IN 46360

OFFICE 219.879.9225
TOLL FREE 888.452.4053
FAX 219.879.9313

#### **PRODUCT DIMENSIONS**

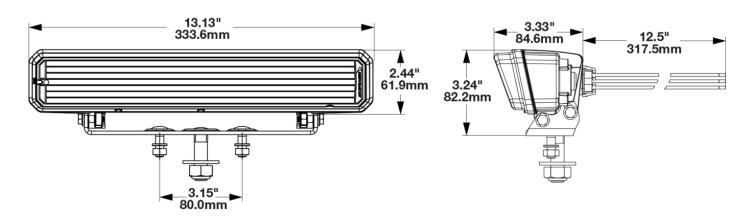

#### **ELECTRICAL SPECIFICATIONS**

**Input Voltage** 12-24V DC **Operating Voltage** 9-30V DC

**Transient Spike Protection** 150V Peak @ 1 HZ-100 Pulses

Red WireFront PositionBlack WireGroundWhite WireHigh BeamYellow WireLow BeamBlue WireDRL

Orange Wire DRL Turn

**Current Draw** 5.00A @ 12V DC (High Beam)

3.50A @ 12V DC (Low Beam) 2.00A @ 12V DC (Front Position)

2.00A @ 12V DC (Front Po 2.50A @ 12V DC (DRL)

1.20A @ 12V DC (Turn)

3.00A @ 24V DC (High Beam) 2.25A @ 24V DC (Low Beam) 1.50A @ 24V DC (Front Position)

1.75A @ 24V DC (DRL) 0.75A @ 24V DC (Turn)



1866 North Country Lane Michigan City, IN 46360

OFFICE 219.879.9225
TOLL FREE 888.452.4053
FAX 219.879.9313

#### REGULATORY STANDARDS COMPLIANCE













Buy America Standards

ECE Reg 6 ECE Reg 87

FMVSS 108 Table VI FMVSS 108 Table XIX

SAE |2087

Tested to ECE Reg. 10 (Radiated Emissions only) ECE Reg 112 ECE Reg 7 Eco Friendly

FMVSS 108 Table XIV FMVSS 108 Table XVIII

SAE |222

#### PHOTOMETRIC SPECIFICATIONS

**Effective Lumen** 

**Output** 

**Candela Output** 

Beam Pattern(s)

Raw Lumen Output 4,300 (High Beam); 2,370 (Low) 1,060 (High Beam); 587 (Low)

58,000

Forward Lighting - Daytime

Running Light

Forward Lighting - High Beam

(DOT/ECE)


Forward Lighting - Low Beam (ECE

Right Hand)

Forward Lighting - Low Beam

(DOT/ECE)

Signalization - Front Position Signalization - Turn (Front)

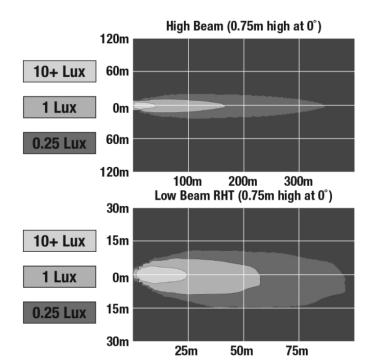



1866 North Country Lane Michigan City, IN 46360

OFFICE 219.879.9225 TOLL FREE 888.452.4053 FAX 219.879.9313

#### **APPLICATIONS**















### **INSTALLATION & APPLICATION INFORMATION**

Each kit includes 2 lamps: a "LH" left hand lamp and a "RH" right hand lamp. This refers to installing the correct light on the left hand or right hand side of your vehicle,

Pedestal mount snow plow lights for single or double bolt mounts. Each lamp comes with mounting hardware for single bolt mount included ( $1/2-13 \times 1.75$  SS Carriage Bolt with hex nut and washer), in addition to the 2 M8-1.25 x 25 SS Carriage Bolts for double bolt mounts.

#### SMARTHEAT™ HEATING SYSTEM

The SmartHeat™ heating system senses ambient temperature and turns the integrated heating system in the lens on & off. This system actually clears ice & snow twice as fast as conventional halogen lamps.

#### When does the heater turn on?

Heater turns on or off according to temperature changes and vehicle power:

- · Heater will turn on when temperatures drop, generating enough heat to prevent ice build-up.
- Heater will turn on when powering up, de-icing the light as rapidly as possible.

#### When does the heater turn off?

Heater will turn off when it senses temperatures increase and are above the high temperature threshold.

Learn more about this technology here.

See Additional Information on page 1 for heated wire installation



1866 North Country Lane Michigan City, IN 46360

OFFICE 219.879.9225
TOLL FREE 888.452.4053
FAX 219.879.9313

### **RELATED PRODUCTS**





### Part Number 0556383

12-24V ECE LHT Heated Low Profile Headlight - 2 Light Kit



1866 North Country Lane Michigan City, IN 46360

OFFICE 219.879.9225
TOLL FREE 888.452.4053
FAX 219.879.9313