PRODUCT INFORMATION

Description 12-24V DOT LED Heated Amber Rear

Turn Light with Harness

 Height
 57.00 mm / 2.24 in

 Width
 165.50 mm / 6.52 in

 Depth
 21.00 mm / 0.83 in

Shape Oval

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color

Black

Bezel Color

Amber

Mounting Type Grommet/Flange Bracket

Retrofits Standard 2" x 6" Signal Lights

Minimum Operating -40 °C / -40 °F

Temperature

Maximum Operating 50 °C / 122 °F

Temperature

Mating Connector 3-Pin AMP Connector (282087-1)

Product Weight 0.35 lbs / 0.16 kgs

Additional Information Part Number Includes Wiring Harness

3270501









1040 HIGHWAY 212 Michigan City, IN 46360

OFFICE 219.879.9225
TOLL FREE 888.452.4053
FAX 219.879.9313
sales@msfoster.com

www.msfoster.com


PRODUCT DIMENSIONS

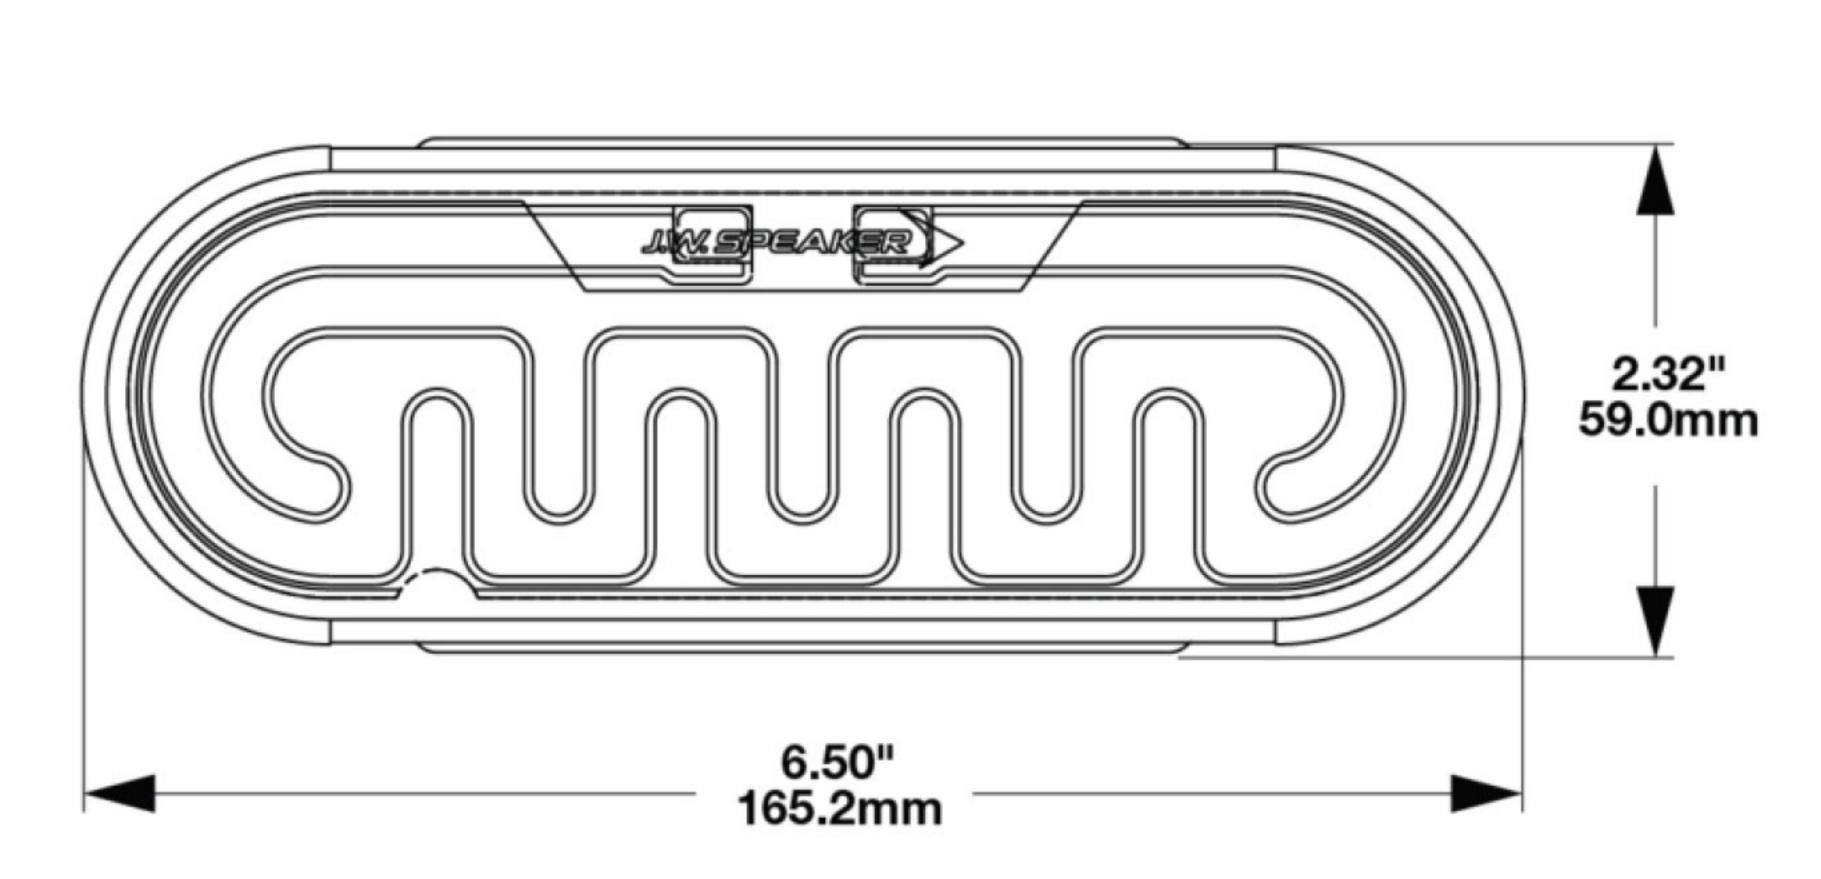

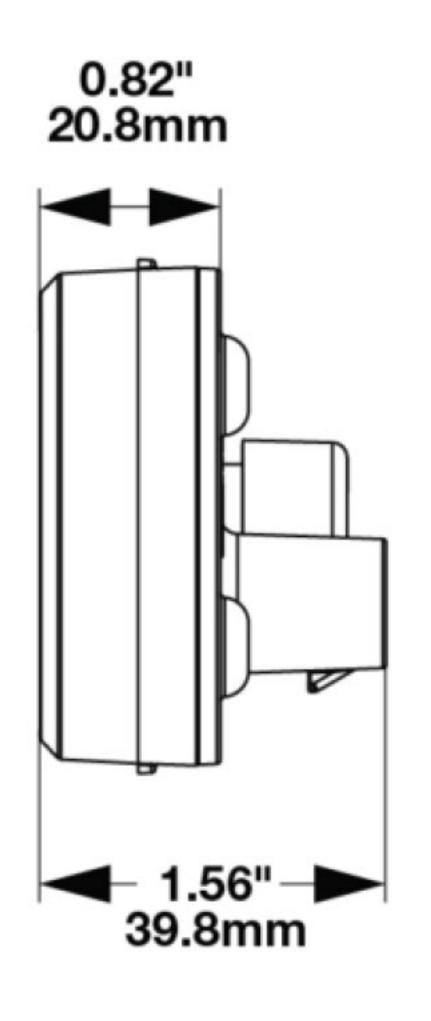


Pin Out Information

LIGHT (Socket shown 1 top)

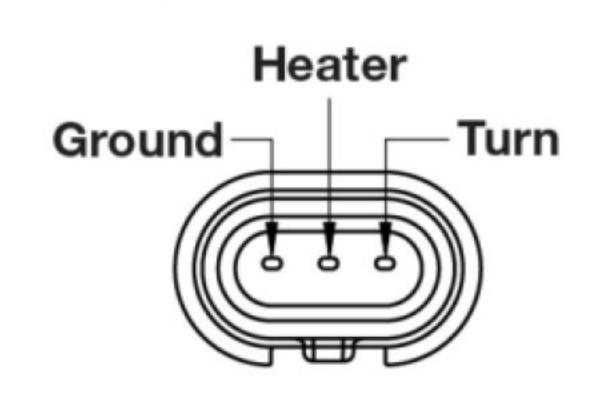

WIRE HARNESS*

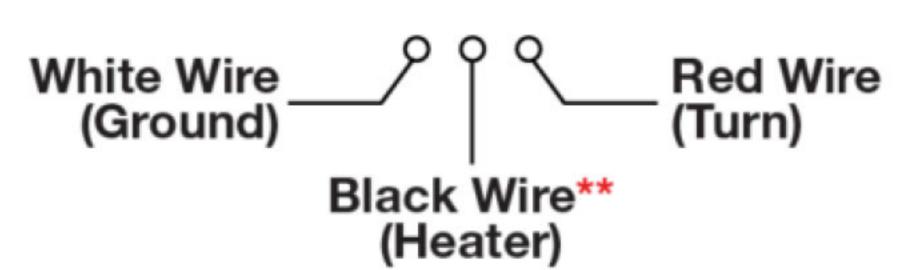

*Wire harness sold separately on Part # 0346711. Wire harness included on Part # 0346714. Also available as a single accessory (Part # 3270501)

**To operate heating circuit on the Turn Signal Lamp, a separate constant 12V DC power line must be wired.



OFFICE 219.879.9225
TOLL FREE 888.452.4053
FAX 219.879.9313
sales@msfoster.com

www.msfoster.com

ELECTRICAL SPECIFICATIONS

Input Voltage 10-30V DC Operating Voltage 12-24V DC

Transient Spike Protection 150V Peak @ 1 HZ-100 Pulses

White Wire Ground

Black Wire Heater Only

Red Wire Amber Rear Turn

Current Draw 0.45A @ 12V DC (Turn)

0.30A @ 24V DC (Turn) 0.85A @ 12V DC (Heater) 0.55A @ 24V DC (Heater)

REGULATORY STANDARDS COMPLIANCE











Buy America Standards
FMVSS 108 Table VII
Tested to ECE Reg. 10
(Radiated Emissions only)

Eco Friendly SAE J588

PHOTOMETRIC SPECIFICATIONS

Beam Pattern(s) Signalization - Turn (Rear)

APPLICATIONS









1040 HIGHWAY 212 Michigan City, IN 46360

OFFICE 219.879.9225
TOLL FREE 888.452.4053
FAX 219.879.9313
sales@msfoster.com
www.msfoster.com

INSTALLATION & APPLICATION INFORMATION

Installation requires the black wire (for the heater) to be connected to a constant power source in order for the heater to work. Turn off power before installing.

ACCESSORIES











<u>Part Number</u> <u>4242891</u>

Rubber Mounting Grommet for Model 274



Plastic Mounting Flange for Model 274

Part Number 8200581

Steel L-Shaped Mounting Bracket for Model 274

<u>Part Number</u> 8200591

Chrome Plastic Trim Ring for Model 274

<u>Part Number</u> 3270501

3-Pin AMP Connector (#282087-1) Wire Harness Assembly



OFFICE 219.879.9225
TOLL FREE 888.452.4053
FAX 219.879.9313
sales@msfoster.com
www.msfoster.com

RELATED PRODUCTS



<u>Part Number</u> <u>0346701</u>

12-24V DOT LED Heated Red Stop, Tail, & Turn Light



<u>Part Number</u> <u>0346704</u>

12-24V DOT LED Heated Red Stop, Tail, & Turn Light with Harness



<u>Part Number</u> <u>0346711</u>

12-24V DOT LED Heated Amber Rear Turn Light



<u>Part Number</u> <u>0346721</u>

12-24V DOT LED Heated White Reverse Light



<u>Part Number</u> <u>0346724</u>

12-24V DOT LED Heated White Reverse Light with Harness



<u>Part Number</u> 0346781

12-24V DOT LED Heated Amber Front Position & Front Turn Signal Light



<u>Part Number</u> 0346784

12-24V DOT LED
Heated Amber Front
Position & Front Turn
Signal Light with
Harness



<u>Part Number</u> 0346791

12-24V DOT LED Heated Amber Side Marker Light



OFFICE 219.879.9225
TOLL FREE 888.452.4053
FAX 219.879.9313

sales@msfoster.com www.msfoster.com