PRODUCT INFORMATION

Description 12-24V DOT/ECE RHT Heated Low

Profile Headlight - 2 Light Kit

 Height
 83.00 mm / 3.27 in

 Width
 334.00 mm / 13.15 in

 Depth
 85.00 mm / 3.35 in

Shape Rectangular

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing MaterialAluminumHousing ColorBlackBezel ColorBlack

Mounting Hardware Description (x2) M8-1.25 x 25mm SS Carriage Bolt

Mounting Type Universal Pedestal Mount

Retrofits Pedestal mount snow plow lights

Minimum Operating -30 °C / -22 °F


Temperature


Maximum Operating 55 °C / 131 °F

Temperature

Connector or Wiring 6-Pin Delphi (#12052848)

Mating ConnectorDelphi (#12052848)Product Weight1.20 lbs / 0.54 kgsShipping Weight6.25 lbs / 2.83 kgs

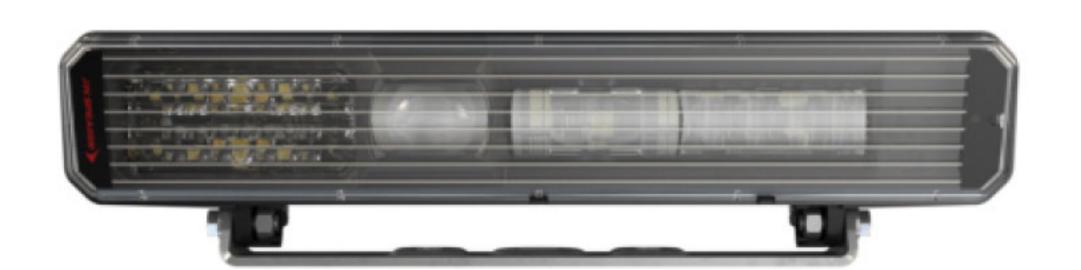

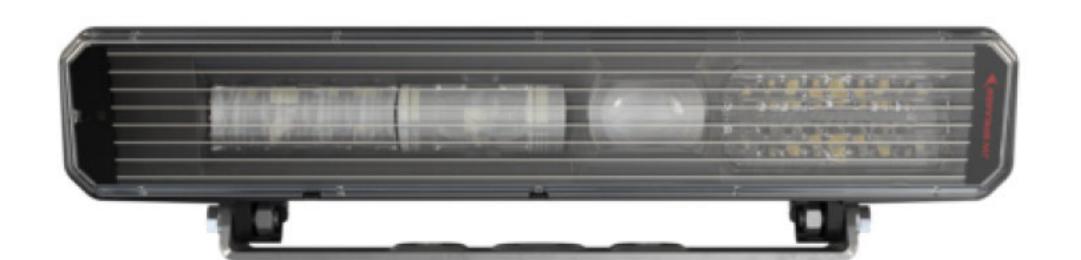








PRODUCT DIMENSIONS

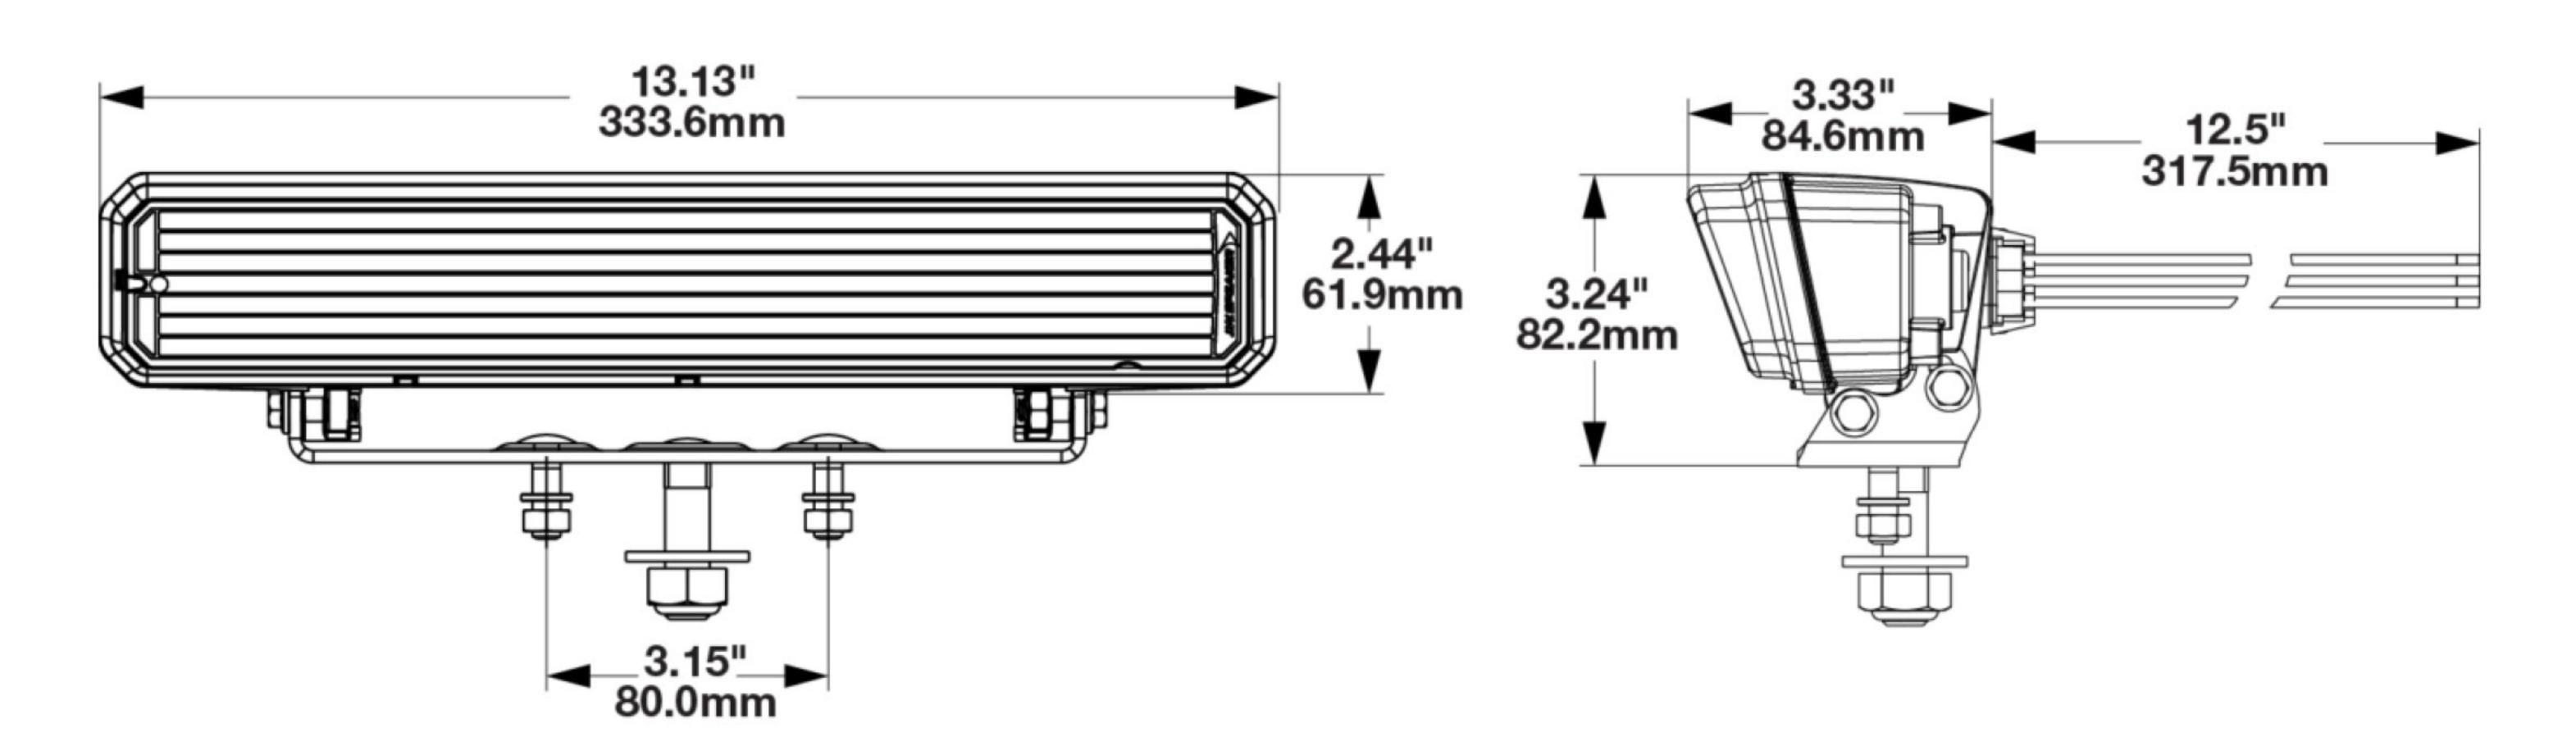

ELECTRICAL SPECIFICATIONS

Input Voltage 12-24V DC
Operating Voltage 9-30V DC

Transient Spike Protection 150V Peak @ 1 HZ-100 Pulses

Red WireFront PositionBlack WireGroundWhite WireHigh BeamYellow WireLow Beam

Blue Wire DRL
Orange Wire Turn

Current Draw 5.00A @ 12V DC (High Beam) 3.50A @ 12V DC (Low Beam)

2.00A @ 12V DC (Front Position)

2.50A @ 12V DC (Front Position) 2.50A @ 12V DC (DRL) 1.20A @ 12V DC (Turn) 3.00A @ 24V DC (High Beam) 2.25A @ 24V DC (Low Beam) 1.50A @ 24V DC (Front Position)

1.75A @ 24V DC (DRL) 0.75A @ 24V DC (Turn)



1040 HIGHWAY 212 Michigan City, IN 46360

OFFICE 219.879.9225
TOLL FREE 888.452.4053
FAX 219.879.9313
sales@msfoster.com


www.msfoster.com

REGULATORY STANDARDS COMPLIANCE







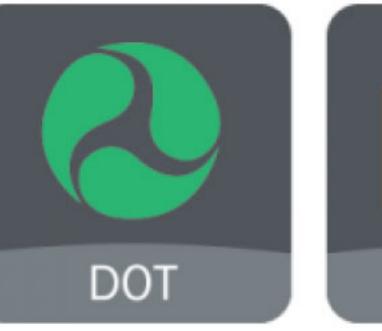





Buy America Standards

ECE Reg 6 ECE Reg 87

FMVSS 108 Table VI FMVSS 108 Table XIX

SAE J2087

Tested to ECE Reg. 10 (Radiated Emissions only) ECE Reg 112 ECE Reg 7 Eco Friendly

FMVSS 108 Table XIV

FMVSS 108 Table XVIII

SAE J222

PHOTOMETRIC SPECIFICATIONS

4,300 (High Beam); 2,370 (Low) Raw Lumen Output **Effective Lumen**

Output

Candela Output

Beam Pattern(s)

1,060 (High Beam); 587 (Low)

58,000 Forward Lighting - Daytime

Running Light

Forward Lighting - High Beam

(DOT/ECE)


Forward Lighting - Low Beam (ECE

Right Hand)

Forward Lighting - Low Beam

(DOT/ECE)

Signalization - Front Position Signalization - Turn (Front)

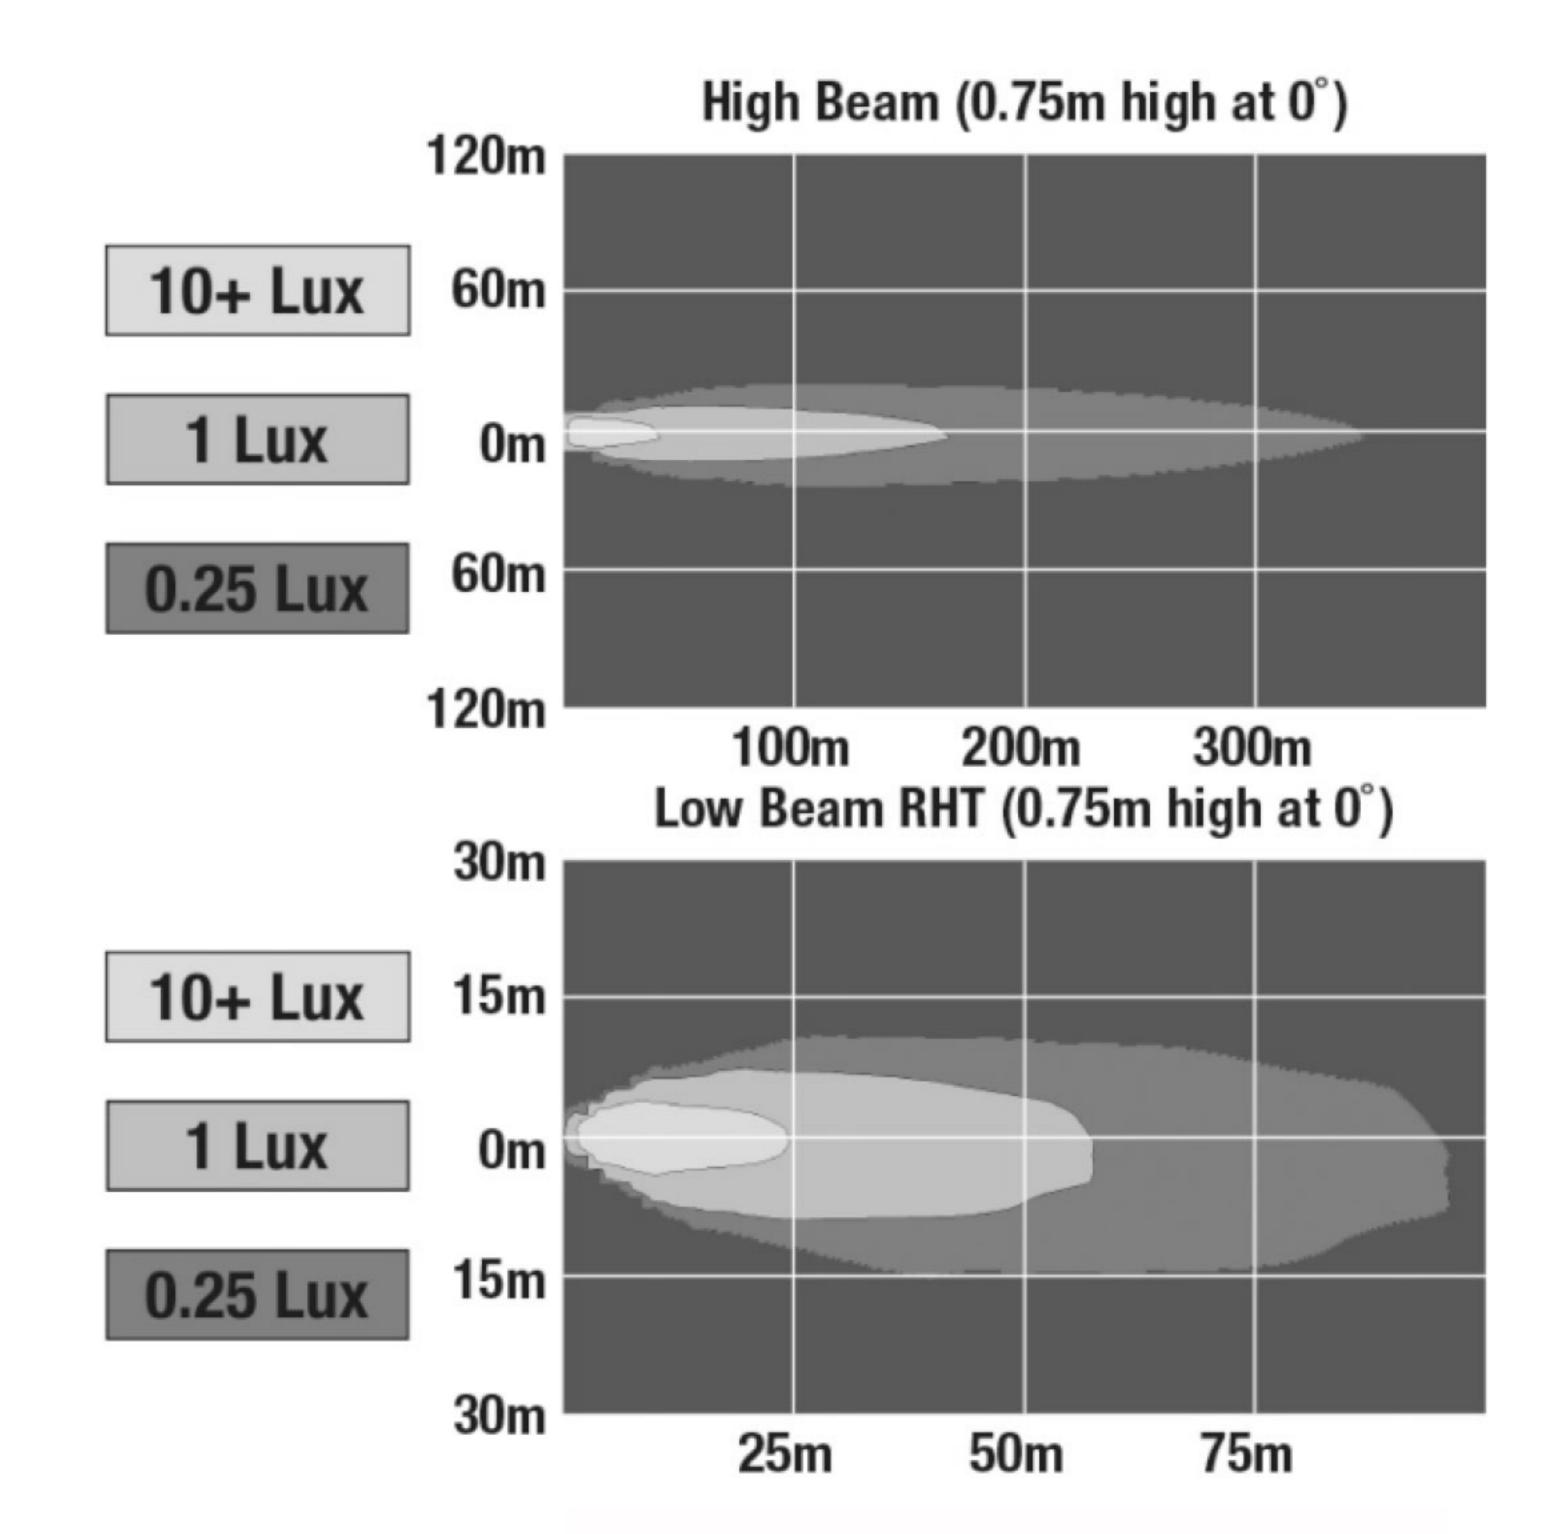



1040 HIGHWAY 212 Michigan City, IN 46360

OFFICE 219.879.9225 TOLL FREE 888.452.4053 FAX 219.879.9313 sales@msfoster.com www.msfoster.com

APPLICATIONS















INSTALLATION & APPLICATION INFORMATION

Each kit includes 2 lamps: a "LH" left hand lamp and a "RH" right hand lamp. This refers to installing the correct light on the left hand or right hand side of your vehicle,

Pedestal mount snow plow lights for single or double bolt mounts. Each lamp comes with mounting hardware for single bolt mount included (1/2-13 x 1.75 SS Carriage Bolt with hex nut and washer), in addition to the 2 M8-1.25 x 25 SS Carriage Bolts for double bolt mounts.

SMARTHEAT™ HEATING SYSTEM

The SmartHeat™ heating system senses ambient temperature and turns the integrated heating system in the lens on & off. This system actually clears ice & snow twice as fast as conventional halogen lamps.

When does the heater turn on?

Heater turns on or off according to temperature changes and vehicle power:

- · Heater will turn on when temperatures drop, generating enough heat to prevent ice build-up.
- Heater will turn on when powering up, de-icing the light as rapidly as possible.

When does the heater turn off?

Heater will turn off when it senses temperatures increase and are above the high temperature threshold.

Learn more about this technology here.

See Additional Information on page 1 for heated wire installation



1040 HIGHWAY 212 Michigan City, IN 46360

OFFICE 219.879.9225
TOLL FREE 888.452.4053
FAX 219.879.9313
sales@msfoster.com

www.msfoster.com

RELATED PRODUCTS





<u>Part Number</u> <u>0556383</u>

12-24V ECE LHT Heated Low Profile Headlight - 2 Light Kit



1040 HIGHWAY 212 Michigan City, IN 46360

OFFICE 219.879.9225
TOLL FREE 888.452.4053
FAX 219.879.9313

sales@msfoster.com www.msfoster.com