





PRODUCT FEATURES:

- High Performance Color Optics
- CMOS Technology
- LED Low Light Assist (19 LEDs)
- Microphone
- Normal/Mirror Image Switch
- Black Aluminum Housing
- IP69K Waterproof Rating
- Corrosion Resistant
- 12 Volt DC
- Available in white or black (VCMS20/VCMS20B)

CONTACT US


1-888-452-4053


1040 HIGHWAY 212 MICHIGAN CITY, IN 46360 SALES@MSFOSTER.COM WWW.MSFOSTER.COM








Color CMOS Camera VCMS20B







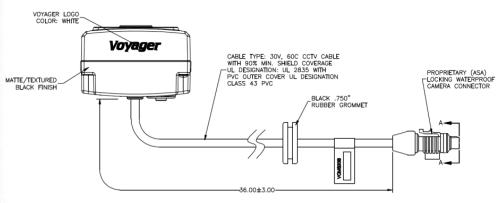



Specifications: ES-0001 Electrical / ES-0013 Environmental **General Specifications:**

General Specifications.			
Power System	12V	12VDC	
Operating Voltage Range	9V – 1	9V – 15VDC	
Power Consumption	161	161 mA	
Operating Temperature Range	-40°F to 185°F	-40°C to 85°C	
Storage Temperature Range	-40°F to 185°F	-40°C to 85°C	
Operating Relative Humidity	100%	100% RH	
Waterproof Rating	IP6	IP69K	
Overall Dimensions (without bracket)	1.61" x 1.82" x 2.75"	40.9 x 46.2 x 68.8 mm	
Product Weight (unpackaged)	8.82 Oz	250 g	
	·		

Optical Specifications

Video Output Signal Format		NTSC		
Video Signal Output Level		1.0V p-p ; 75Ω		
	Sensor		1/3" CMOS	
Shutter speed Resolution CCD Specifications Sensitivity	Iris/Shutter Type		Electronic Automatic	
	Shutter speed		1/60 s ~ 12 μs	
	Resolution		600 TV Lines	
	Sensitivity		() Lux	
	Image Orientation		Mirror / Normal	
	17:	D	145°	
		Н	109°	
	V	93°		

 $Features\ and\ specifications\ subject\ to\ change\ without\ notice.$