

Voyager®

4.3" Observation Monitor

VOM43HD



FEATURES

- Three camera capability
- IPX6 rating
- Bright 4.3" TFT LCD display with anti-glare/scratch protective lens
- Display graphic overlay shows real-time distance from objects
- Built-in speaker
- Manual or automatic source selection
- Turn-signal trigger inputs
- Screen saver mode
- e-Mark certified



VCCYL37



VCMS155B



VCMS140i

CONTACT US

1-888-452-4053


1040 HIGHWAY 212
MICHIGAN CITY, IN 46360

SALES@MSFOSTER.COM
WWW.MSFOSTER.COM



Voyager®

4.3" Observation System VOM43HD

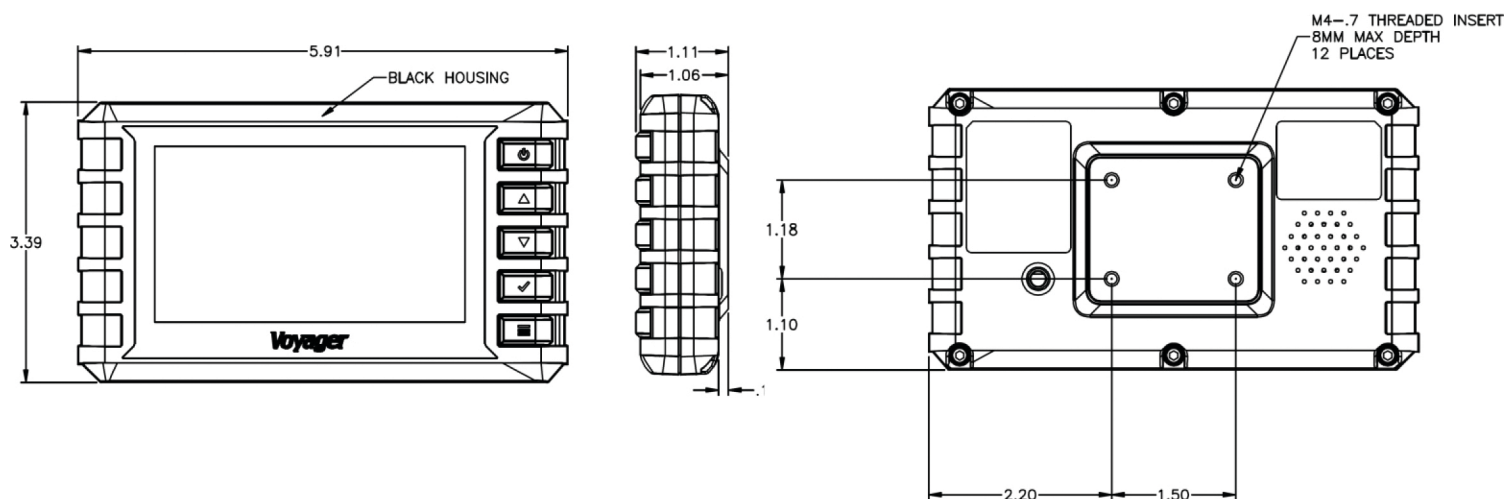

SPECIFICATIONS:

General Specifications:

Power System	12 V DC	
Operating Voltage Range	9V to 24V	
Current Draw @ 12V with 4 cameras connected	Idle	460mA
	Nominal	762mA
	Maximum	1.1A
Operating Temperature Range	-22°F to 176°F	-30°C to 80°C
Storage Temperature Range	-40°F to 185°F	-40°C to 85°C
Maximum Relative Humidity	100%	
Overall Dimensions	5.91"(W) x 3.39"(H) x 1.09"(D)	
Product Weight (unpacked)	2.65 lbs	
Water Resistance level	IPx6	

Performance Specifications:

Video / Display System			NTSC/PAL
Video Input Signal (Composite)			1V P-P @ 75Ω
Audio Output			1W
LCD Specifications	Diagonal Size		4.3"
	Resolution		480 x 272
	Brightness		500 nit
	Contrast Ratio		500:1
	View Angles	Top	70°
		Bottom	70°
		Left	60°
		Right	60°
	Display Format		16:9
	Response Time	Rise	15ms
Fall		20ms	
Backlight Type		LED	
Backlight Life		20,000 Hours	

Features and specifications subject to change without notice.