

Voyager®

Replacement Rearview
Mirror Monitor

VOM74MM



FEATURES

- 7" TFT LCD display with highly-reflective glass surface that serves as a rearview mirror when back-up camera system is not active
- 12VDC power
- PAL/NTSC compatible
- 16:9 aspect ratio
- Three camera inputs
- Manual (push button) or automatic (trigger) source selection
- Built-in speaker

EXPAND your vision™



MS FOSTER

SERVING THE TRANSPORTATION INDUSTRY

CONTACT US

1-888-452-4053


1040 HIGHWAY 212
MICHIGAN CITY, IN 46360

SALES@MSFOSTER.COM
WWW.MSFOSTER.COM

Voyager®

Replacement Rearview
Mirror Monitor

VOM74MM

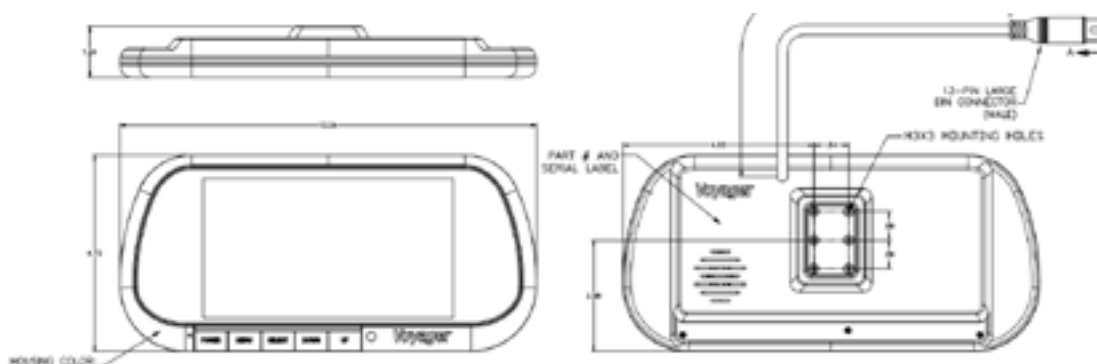

SPECIFICATIONS:

General Specifications:

Power System		12VDC
Operating Voltage Range		10V ~ 32V
Current Draw @ 12V	Idle	55mA
	Nominal	407mA
	Maximum	493mA
Operating Temperature Range		-22°F to 185°F -30°C to 85°C
Storage Temperature Range		-40°F to 203°F -40°C to 95°C
Maximum Relative Humidity		85%
Overall Dimensions (inches)		10.04(W) x 4.72(H) x 1.24(D)
Product Weight (unpackaged)		1.4 lbs(Monitor only)

Performance Specifications:

Video / Display System			NTSC/PAL
Video Input Signal (Composite)			1V P-P @ 75Ω
Audio Output			1W
LCD Specifications	Diagonal Size		7"
	Resolution		800 x 480
	Brightness		400 nit
	Contrast Ratio		500:1
	View Angles	Top	70°
		Bottom	50°
		Left	70°
		Right	70°
	Display Format (aspect ratio)		Analog 16:9
	Response Time	Rise	10ms
		Fall	15ms
Backlight Type		LED	
Backlight Life (min)		50,000 Hours	