PRODUCT INFORMATION


Description Height Width Depth Shape Outer Lens Material Outer Lens Color Housing Material Housing Color Mounting Hardware Description	12-24V LED Red Zone Light 123.70 mm / 4.87 in 258.57 mm / 10.18 in 102.11 mm / 4.02 in Rectangle Glass Clear Xenoy Black (x2) M8-1.25 Mounting Bolt	A W W W W W
Mounting Type	Universal Pedestal Mount	
Minimum Operating Temperature	-40 °C / -40 °F	
Maximum Operating Temperature	65 °C / 149 °F	
Connector or Wiring	Integrated 2-Pin Deutsch Weatherproof Socket (DT04-2P)	
Mating Connector	Integrated 2-Pin Deutsch Weatherproof Plug (DT06-2S)	
Product Weight	2.60 lbs / 1.18 kgs	
Shipping Weight	5.70 lbs / 2.59 kgs	
Additional Information	The dominant wavelength is about 615nm.	



1040 Highway 212 Michigan City, IN 46360

OFFICE 219.879.9225 TOLL FREE 888.452.4053 FAX 219.879.9313

PRODUCT DIMENSIONS

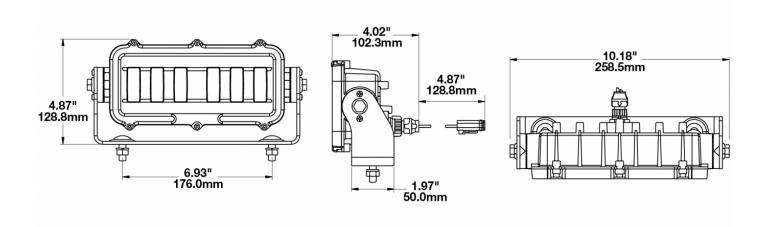

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Operating Voltage	10-32V DC
Transient Spike Protection	150V peak @ 1 HZ-100 Pulses
Red Wire	Positive
Black Wire	Negative
Current Draw	1.6A @ 12V DC 0.85A @ 24V DC

REGULATORY STANDARDS COMPLIANCE



Buy America Standards IEC IP69K Eco Friendly



1040 Highway 212 Michigan City, IN 46360

OFFICE 219.879.9225 TOLL FREE 888.452.4053 FAX 219.879.9313

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	720	"Keep Out" Pattern (6m high at 0°)
Effective Lumen Output	670	10m
Beam Pattern(s)	Forward Lighting - Spot Warning - Keep Out Zone	1 Lux Om
		0.25 Lux 5m
		10m 5m 10m 15m

APPLICATIONS



ACCESSORIES



Part Number 8200151 Rock Guard Kit for Model 527



1040 Highway 212 Michigan City, IN 46360

OFFICE 219.879.9225 TOLL FREE 888.452.4053 FAX 219.879.9313

RELATED PRODUCTS







Part Number 0551271 12-24V LED Green Zone Light



Part Number 0551281 12-24V LED Amber Zone Light



1040 Highway 212 Michigan City, IN 46360

OFFICE 219.879.9225 TOLL FREE 888.452.4053 FAX 219.879.9313